

FlowDepth SRP

Absolute Rated Depth Filter Cartridge

FlowDepth SRP is an absolute rated filter cartridge with superior graded depth filtration, giving precise and repeatable performance with Beta Ratio 5000 efficiency.

Flowdepth SRP has been specifically developed to remove particulates that will foul SRP membranes prematurely.

Standard size elements are available from 10" to 40" long and can be supplied with a full range of thermally welded end caps.




Key Features & Benefits

- Beta Ratio 5000 absolute micron rating for consistent SRP membrane protection.
- Superior graded density giving high dirt holding capacity
- High voids volume for low clean pressure loss
- Long service life
- Meltblown construction

Applications: Upstream Oil & gas

Materials of Construction: 100% Polypropylene or Nylon

Recommended Operating Conditions PP/N: Recommended ΔP @ 20°C = 2/2 bar, Maximum ΔP @ 20°C = 4/4 bar, Maximum ΔP @ 80°C = 0.5/1 bar, Maximum ΔP @ 135°C = N/A/0.5 bar

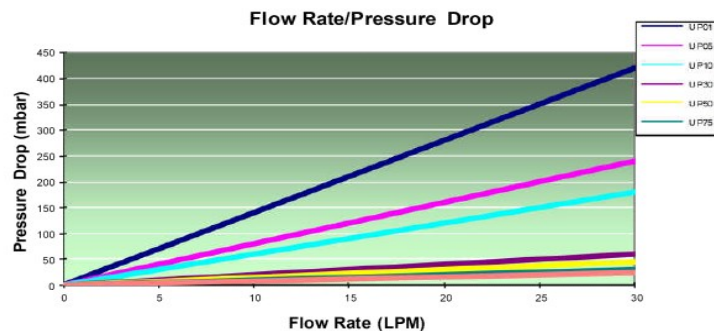

Dimensions: Outside Diameter: 63mm, Core Diameter: 28mm, Length: 250 -1070mm

Material Compliance: Contains no resins, binders or adhesives, materials conform to 21 CFR part 177.

Product Guide

Micron Grades — 1,5,10,20,30,50

Lengths— 10,20,30,40

Endcaps —DOE, 2,3,7,8 ,Specials on request

Seal— EPDM, Nitrile, Silicone, FEP, Viton

